

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/084665 A2**

(51) International Patent Classification<sup>7</sup>: **A42B 3/22**

(21) International Application Number:  
**PCT/GB2004/001395**

(22) International Filing Date: 29 March 2004 (29.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0307111.5 27 March 2003 (27.03.2003) GB  
0324880.4 24 October 2003 (24.10.2003) GB

(71) Applicant (for all designated States except US): **HELMET INTEGRATED SYSTEMS LIMITED** [GB/GB];  
Unit 3, Focus 4, Fourth Avenue, Letchworth, Hertfordshire  
SG6 2TU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHURCH, Colin**


[GB/GB]; Helmet Integrated Systems Limited, Unit 3, Focus 4, Fourth Avenue, Letchworth, Hertfordshire SG6 2TU (GB). **DAMPNEY, Ian, Trevor** [GB/GB]; Helmet Integrated Systems Limited, Unit 3, Focus 4, Fourth Avenue, Letchworth, Hertfordshire SG6 2TU (GB).

(74) Agents: **MOIR, Michael, Christopher et al.**; Mathys & Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: **RESPIRATOR**

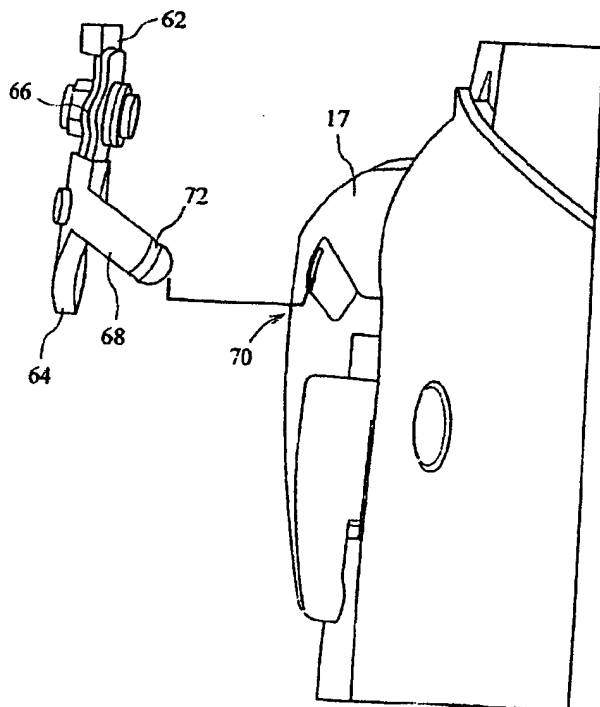

(57) Abstract: A respirator helmet (10) or other helmet adapted to receive, by means of a plug (66) and socket arrangement (70), a pivotable bar (62) carrying a protective screen (63) such that the screen may be moved between a lowered position in front of the face of the wearer of the helmet and a raised position.

WO 2004/084665 A2

**WO 2004/084665 A2**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

RESPIRATOR

The present invention relates to a respirator, or other helmet, for example, a visored protective helmet.

5

A respirator of self-contained form for use in oxygen-sufficient atmospheres is described in GB 2,183,488. The respirator includes a domed shell incorporating a harness for engagement with a user's head and having a visor depending from the front of its rim to extend over and round the user's face. The shell is spaced  
10 above the harness, and projects forwardly and rearwardly of the harness, to define a passageway which extends from a rear opening across the head and then downwardly over the face behind the visor. A battery-driven electric fan is located in the passageway adjacent its rear opening to draw ambient air into the opening to flow through the passageway. The shell is provided with a pad filter  
15 fitted across the passageway rear opening.

The protection afforded by such respirators is limited to a certain level of physical protection from the shell of the respirator and the chemical protection afforded by the filter.

20

In at least its preferred embodiment, it is an aim of the present invention to address this and other problems.

A first aspect of the invention provides a screen bar for a respirator helmet or  
25 other helmet as set out in claim 1. A screen bar of this sort may be used to add further protective elements (e.g. a welding shield) to the helmet. Further aspects provide a helmet adapted to receive such a screen bar, and a helmet and a screen bar in combination.

30 Furthermore, as the filter becomes blocked or as the voltage of the fan battery falls, the air flow through and the pressure within the respirator will fall, reducing

WO 2004/084665

PCT/GB2004/001395

- 2 -

the efficiency of the respirator and thus the protection afforded to the user. In order to detect the falling efficiency, it is known to mount devices within the respirator which provide a visual indication to the user that the degree of protection is falling. For example, GB 2,130,893 describes the mounting of a float-type pressure gauge within the respirator and the field of view of the user. However, such devices are unable to provide any active control of the air supply within the respirator.

In further embodiments, the present invention seeks to solve these and other problems.

Another aspect of the present invention provides a respirator comprising a hood for enclosing at least the face area of a user, a filter, a fan for generating a flow of air through the filter, a duct for delivering the flow of filtered air to the vicinity of the user's face, a bypass conduit for abstracting a portion of the flow from the duct and subsequently returning the abstracted portion to the remainder of the flow, means for measuring the flow rate of air through the bypass conduit and means for controlling the fan in response to the measured flow rate.

Other advantageous features are illustrated in the dependent claims, the description given below and the appended drawings.

Preferred features of the present invention will now be described with reference to the accompanying drawings, in which:

25

Figure 1 is a side perspective view of a respirator;

Figure 2 is a perspective view of the respirator of Figure 1;

Figure 3 is a side perspective view of the respirator of Figure 1 with some components partially omitted to show the location of the air duct;

WO 2004/084665

PCT/GB2004/001395

- 3 -

Figure 4 illustrates a cross-sectional view of the respirator of Figure 1;

Figure 5 illustrates a cross-sectional view of the filter and fan of the respirator;

5 Figure 6 illustrates a system for controlling a fan of the respirator of Figure 1;

Figure 7A illustrates a respirator adapted to receive a bar carrying a further protective screen;

10 Figure 7B illustrates the respirator of Figure 7A with the bar and screen attached;

Figure 8 shows an end of the bar, illustrating the mechanism by which it is fixed to the respirator;

15 Figure 9 shows an arm and rod forming part of the mechanism by which the bar is fixed to the respirator;

Figure 10 illustrates the manner by which the bar is fixed to the respirator;

20 Figure 11 is a detail view of the mechanism by which the bar is fixed to the respirator with the screen in a lowered position; and

Figure 12 is a detail view of the mechanism by which the bar is fixed to the respirator with the screen in a raised position.

25

With reference to figures 1 to 4, respirator 10 comprises a hood having a domed, impact resistant outer shell 12 attached to a rigid, inner shell 14 carrying a visor 16 pivotally attached thereto. The peripheral edge of the inner shell 14 is sealed to a head cowl 18 made to fit a range of head sizes of designated users. The  
30 cowl envelops the head of the user and, together with the inner shell 14 and visor 16, defines a breathing zone for the user 20. A neck seal 22 (figure 4) is

WO 2004/084665

PCT/GB2004/001395

- 4 -

attached to the cowl so as to seal in use around an upper part of a user's neck. Alternatively, the head cowl 18 may be incorporated in a full body suit.

Air is delivered to the breathing zone by an air delivery duct 24 extending from the rear of the inner shell 14 to deliver a flow of air in the vicinity of the face of the user 22. A fan 26 located at the rear of the inner shell 14 propels air through the duct 24. An air filter 28 is provided to filter air entering the fan 26 via air inlets 27. The fan 26 is powered by batteries 29 which may be either removably housed in compartments 29a located proximate the ears of the user on either side of the shell 14 (to provide for a low centre of gravity for the respirator), or otherwise provided in a belt pack strapped to the waist of the user 22. Exhalate from the breathing zone issues from the respirator 10 via one or more apertures 44 which may be valved in the lower portion of the respirator.

With reference to figures 4 and 5, air entering the air filter 28 through the air inlets 27 passes through pleated glass fibre papers 30 which filter the air flow, and leaves the filter 28 through a central aperture 31. The filter 28 carries a screw thread 32 to enable the filter 28 to be releasably secured to a conformingly profiled thread formed on the inlet structure 33 of the fan casing for ease of replacement of the filter. The fan 26 is a tangential fan in which the air is turned from parallel to the axis of rotation on entry to a direction tangential to the arc described by the tips of the rotating blades of the fan so as to be discharged through an elbow into the duct 24. The chassis 34 has a U-section annulus that holds a resilient anti-vibration mounting which, in turn, holds the two major parts 37, 38 of the fan casing. The fan motor 40 is directly mounted on to the fan 26, and is switched on and off by a microswitch operated by a quadrant arm 42 that rests against the user's head.

This arrangement of the air filter and fan serves to position the air filter closer to the back of the user's head, bringing the centre of gravity of the respirator close to the centre of the user's head. In addition, no recirculation plate is required; the

WO 2004/084665

PCT/GB2004/001395

- 5 -

inlet structure 33 preventing substantial recirculation.

In order to control the air flow through the breathing zone, the respirator includes a system for controlling the speed of the fan 26. The respirator 10 includes a  
5 bypass conduit 44 for abstracting a portion of the air flow from the air delivery duct 24. With reference to figures 4 and 6, air entering the bypass conduit 44 from the duct 24 flows into an air flow sensor 46, such as, for example, a Honeywell AWM series mass air flow sensor, and, from the sensor, back into the remainder of the air flow within the duct 24. Alternatively, the bypass conduit  
10 may exhaust directly into the breathing zone.

A mass air flow sensor typically comprises two temperature sensors, such as thermistors, within a conduit, one of each side (upstream and downstream) of a heater. The heat transfer characteristic of the heater is linked to the number of  
15 air molecules passing across it at a certain velocity. A signal output from the sensor is indicative of the mass flow rate within the bypass conduit 44, as determined from the temperature difference between the two temperature sensors. The signal 48 is received by a microprocessor 50, which determines from the signal the mass flow rate within the duct 24, the relationship between  
20 the flow in the duct 24 and the conduit 44 having being previously determined and programmed in the microprocessor. From the thus-measured flow rate in the duct 24, the microprocessor 50 controls the mark/space ratio of a signal output to the motor of the fan 26 in order to maintain a constant flow rate in the air duct 24. This enables any drop in the flow rate due, for example, to the gradual build-  
25 up of debris in the air filter 28 or loss of battery power, to be compensated for by increasing the fan speed.

Upon starting the system, the condition of the air filter is initially unknown, so the control signal output to motor for the fan initially has a predetermined mark/space  
30 ratio. This ratio is then adjusted coarsely according to the output from the detector 46 so that the flow rate falls rapidly within a target window, and then

WO 2004/084665

PCT/GB2004/001395

- 6 -

more accurately so that the flow rate is at a target value. The microprocessor 50 will then continually make small adjustments to the mark/space ration to maintain a target flow rate through the duct 24. A boost switch may be provided for use by the user to temporarily increase the air flow.

5

In order to alert the user 22 of a measured drop in the flow rate through the conduit, a display 52 connected to the microprocessor 50 is provided on the visor 14. For example, the display 52 may comprise a series of light emitting diodes, the diodes being illuminated progressively by the microprocessor 50 depending  
10 on the mark/space ratio of the signal supplied to the motor of the fan, the level of which is indicative of problems associated with, for example, the degree of blocking of the air filter.

Further embodiments will now be described which enable the wearer of a  
15 respirator to attach additional protection appropriate to an activity which he is to carry out while wearing the respirator (for example, a welding shield or a mesh visor).

Figures 7A and B show a respirator 10' generally in accordance with the  
20 foregoing (like numerals indicating like features) with the exception that the filter 28 is not visible in the figures. In addition to the features set out above, the respirator of this embodiment is adapted to receive a bar carrying a protective screen by means of a plug/socket arrangement, such that the screen is disposed in front of the wearer's face. The respirator is shown without the screen in figure  
25 7A and with the screen 60 (in this case a welding shield) attached in figure 7B.

The bar 62 is curved such that it conforms approximately to the shape of the outer shell 12 of the respirator. Each end of the bar 62 (one of which is shown in figure 8) is provided with a respective arm 64, an end of which is pivotably  
30 mounted to the end of the bar 62 by means of a respective pivot 66. The arrangement of the bar 62, the arms 64 and the rotation of the pivots 66 (being



WO 2004/084665

PCT/GB2004/001395

- 7 -

generally coaxial), is such that, with the arms held so that they are generally horizontal and at the same height, the bar can pivot generally upwards and downwards. At a lower end of the range of movement of the bar 62 relative to the arms 64 (in which the screen depending from the bar will be in front of the  
5 wearer of the respirator when the bar is attached thereto), the arms extend generally forwards (with respect to the wearer of the respirator) and are generally parallel with the bar 62. In this position, the bar 62 is constrained by the pivots 66 from further downward movement.

10 The free end 65 of each arm 64 carries a re-entrant (with respect to the curvature of the bar) plug in the form of a rod 68 (see figure 9) which extends from the end of the arm 64 remote from the pivot 66, generally in the direction of the pivot 66 but forming an acute angle with the arm 64 to which it is attached. Towards the  
15 free end of the rod 68, there is provided a circumferential detent 72, having an obtuse-angled, V-shaped cross-section.

Returning to figure 1, 2 and 7A, each side of the outer shell 12 of the respirator is provided, adjacent the temple region thereof, with a respective socket in the form of a channel 70 extending in a generally fore-aft direction. In the  
20 embodiment shown, the channels 70 are provided on visor pivot covers 17 of the respirator slightly above and to the rear of pivots provided for the visor 16 itself. In this way, the screen 63 and the visor 16 may be raised together, or the screen 63 may be raised independently of the visor 16 whilst the respirator is being worn.

25

With reference to figures 7A, 10 and 11, each channel 70 is adapted to receive one of the rods 68 and to retain it by means of the detent 72 which engages with corresponding retaining structure 74 in the channel 70, such that a screen 60 depending from the bar 62 may be rotated from a lowered position (as shown in  
30 figure 7B), in which it is disposed in front of the wearer's face, to a raised position, in which the bar 62 extends generally across the top of the respirator

WO 2004/084665

PCT/GB2004/001395

- 8 -

and the screen 60 extends generally forwards and does not obstruct the wearer's view (a detail of which position is shown in figure 12).

With the screen bar (and attached screen) of this embodiment is fixed to the  
5 respirator, the wearer may raise and lower the screen whilst the helmet is being worn.

While this embodiment has been described with reference to its application to a respirator, it is equally applicable to other types of helmets not having a respirator  
10 function.

Each feature disclosed in this specification (which term includes the claims) and/or shown in the drawings may be incorporated in the invention independently of other disclosed and/or illustrated features.

WO 2004/084665

PCT/GB2004/001395

- 9 -

CLAIMS

1. A screen bar for a respirator helmet or other helmet adapted to carry a protective screen and comprising half of at least one plug and socket  
5 arrangement by which the bar can be mounted on the helmet to dispose the screen in front of the wearer's face.
2. A screen bar as claimed in claim 1 being of a curved shape to conform approximately to the shape of the helmet, and having halves of respective plug  
10 and socket arrangements at each end.
3. A screen bar as claimed in claim 1 or claim 2 wherein the half of the plug and socket arrangement is a plug.
- 15 4. A screen bar as claimed in claim 3, wherein the plug comprises a rod having a detent for engaging a corresponding retaining structure in the socket.
5. A screen bar as claimed in any preceding claim, wherein the bar is pivotable relative to at least one plug and socket arrangement so that the screen  
20 can be raised whilst the helmet is being worn.
6. A screen bar as claimed in claims 4 and 5 comprising a pivot adjacent each end of the bar, an arm extending from each pivot, the rod being attached to the arm at a point spaced from the pivot so that a free end of the rod extends  
25 back towards the pivot.
7. A respirator or other helmet adapted to carry a protective screen by means of a bar as claimed in any preceding claim, and comprising the other half of the at least one plug and socket arrangement of the bar.  
30
8. A helmet as claimed in claim 7 when dependent from claim 2, having

WO 2004/084665

PCT/GB2004/001395

- 10 -

halves of two plug and socket arrangements adjacent the temple regions of the helmet.

9. A helmet as claimed in claim 8, wherein the helmet halves of the plug and  
5 socket arrangement are provided on a visor of the helmet.

10. A helmet as claimed in claim 9 when dependent from claim 3 or claim 4,  
wherein the said helmet halves of the plug and socket arrangement are sockets.

10 11. A helmet as claimed in claim 10, wherein the sockets are disposed on  
visor pivot covers of the helmet.

12. A helmet as claimed in any of claims 7 to 11, in combination with a screen  
bar as claimed in any of claims 1 to 6.

15

13. A helmet and screen bar combination as claimed in claim 12, the screen  
bar being as claimed in claim 6, each bar pivot being positioned relative to an  
adjacent pivot of a visor of the helmet so that the helmet visor and the protective  
screen can be raised together whilst the helmet is being worn.

20

14. A respirator comprising a hood for enclosing at least the face area of a  
user, a filter, a fan for generating a flow of air through the filter, a duct for  
delivering the flow of filtered air to the vicinity of the user's face, a bypass conduit  
for abstracting a portion of the flow from the duct and subsequently returning the  
25 abstracted portion to the remainder of the flow, means for measuring the flow  
rate of air through the bypass conduit and means for controlling the fan in  
response to the measured flow rate.

15. A respirator according to Claim 14, wherein said control means is arranged  
30 to control power supplied to a motor of the fan depending on the measured flow  
rate.

WO 2004/084665

PCT/GB2004/001395

- 11 -

16. A respirator according to Claim 15, comprising display means mounted on said visor for generating a visual alert depending on the output to the motor.
17. A respirator according to any of claim 14 to 16, wherein the fan is a  
5 tangential fan arranged to receive the filtered air flow from the filter substantially parallel to the axis of rotation of the blades of the fan and to discharge the air flow tangentially to the arc described by the tips of the blades into the duct.
18. A respirator according to any of claims 14 to 17, wherein said  
10 measurement means comprises a mass air flow sensor.
19. A screen bar substantially as hereinbefore described with reference to and/or as illustrated in the drawings.
- 15 20. A respirator or other helmet substantially as hereinbefore described with reference to and/or as illustrated in the drawings.
21. A helmet and screen bar combination substantially as hereinbefore described with reference to and/or as illustrated in the drawings.  
20
22. A respirator substantially as herein described with reference to the accompanying drawings.

ABSTRACT

A respirator helmet (10) or other helmet adapted to receive, by means of a plug (66) and socket arrangement (70), a pivotable bar (62) carrying a protective screen (63) such that the screen may be moved between a lowered position in front of the face of the wearer of the helmet and a raised position.

WO 2004/084665

PCT/GB2004/001395

1/10

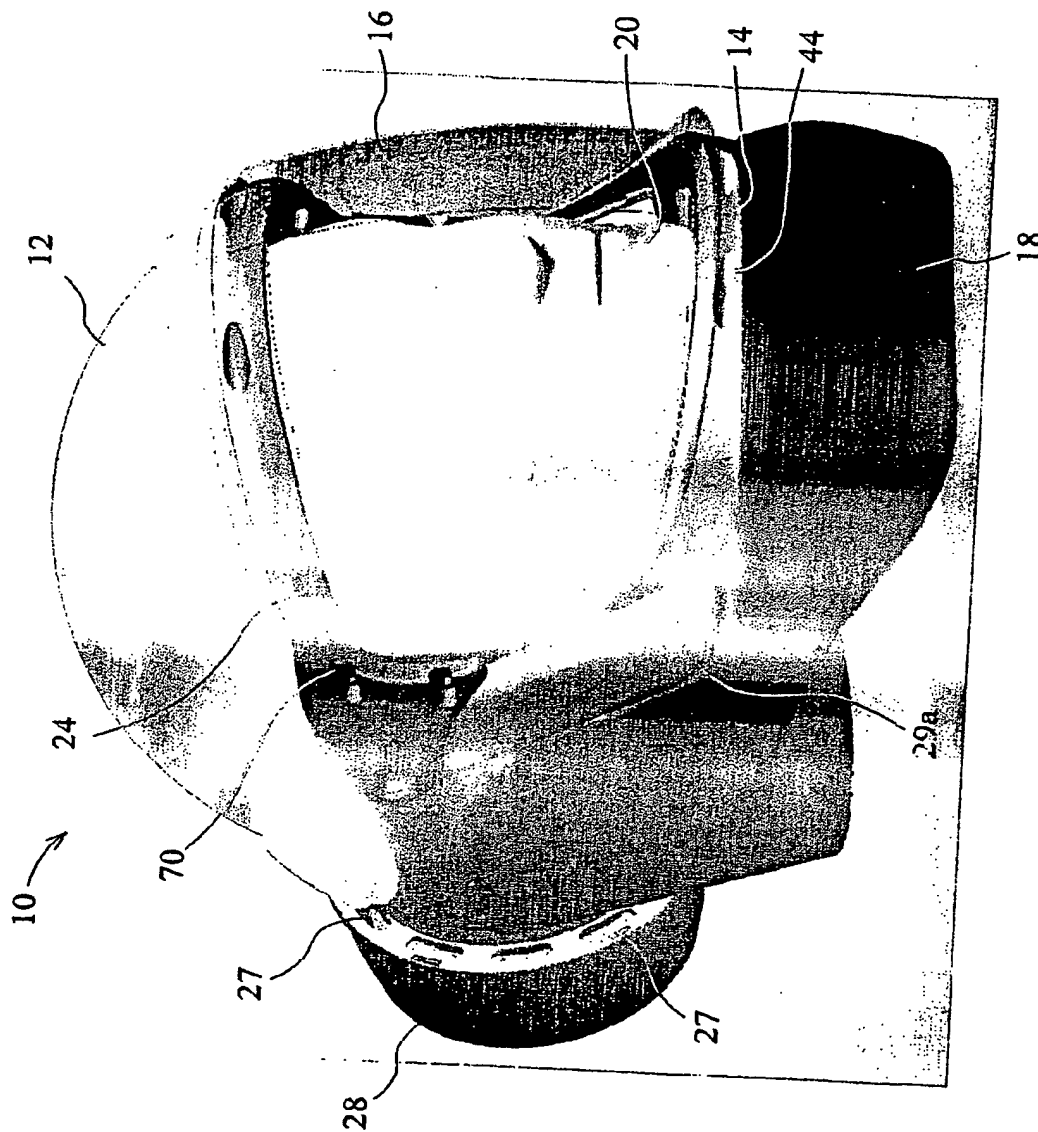
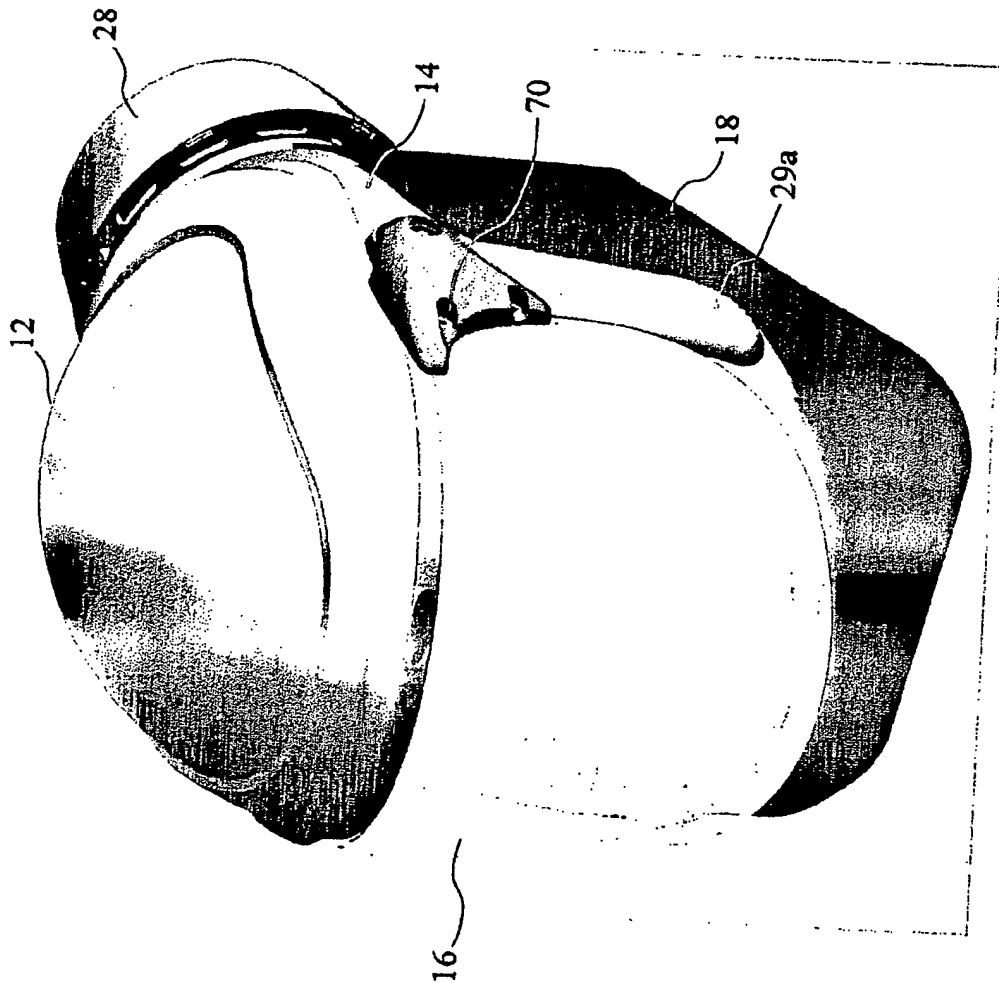


Fig. 1

WO 2004/084665

PCT/GB2004/001395

2/10

*Fig. 2*



WO 2004/084665

PCT/GB2004/001395

3/10

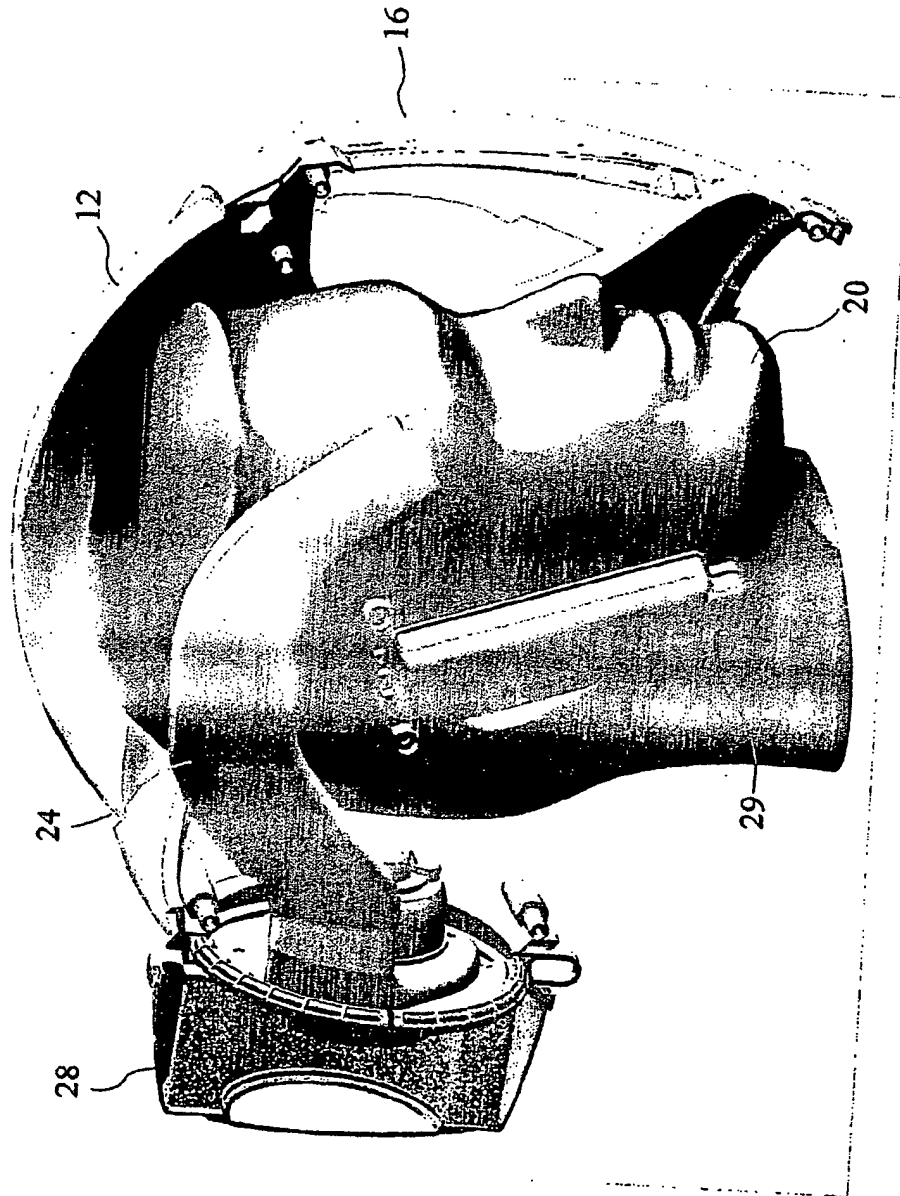


Fig. 3

WO 2004/084665

PCT/GB2004/001395

4/10

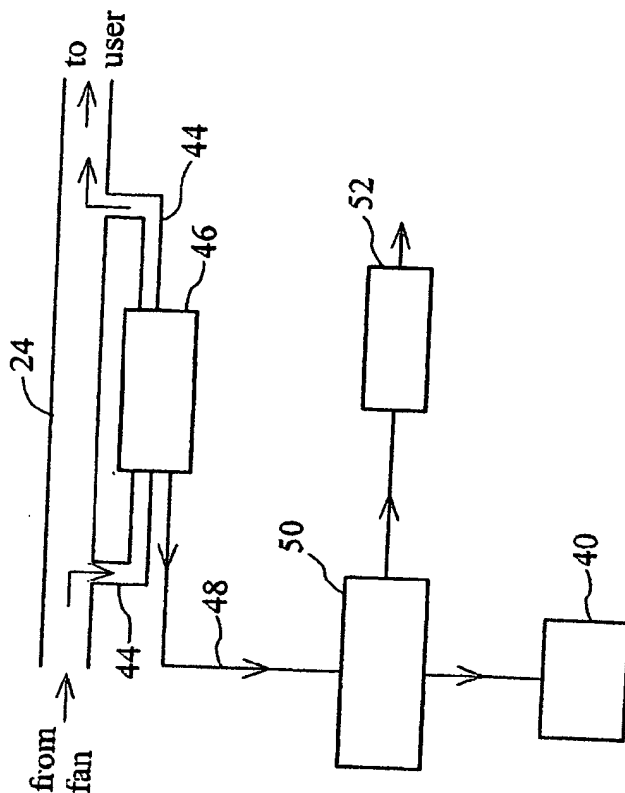


Fig. 6

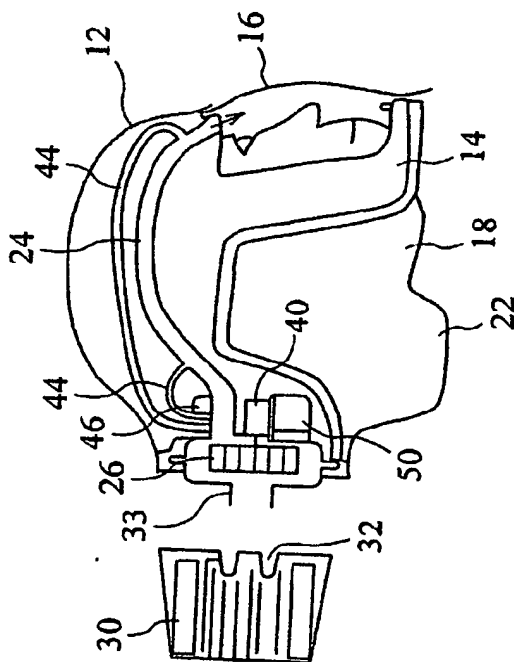


Fig. 4

WO 2004/084665

PCT/GB2004/001395

5/10

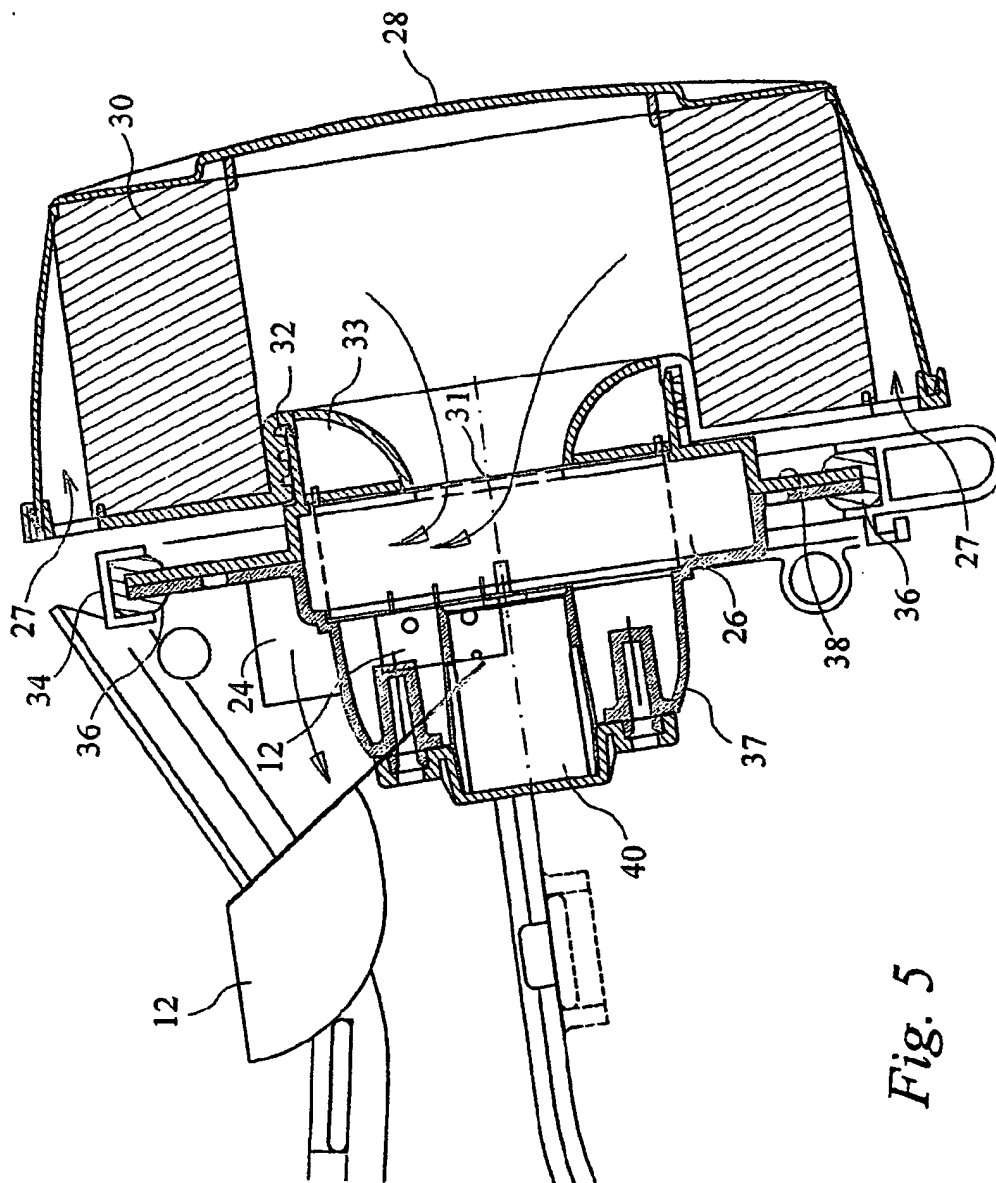


Fig. 5

WO 2004/084665

PCT/GB2004/001395

6/10

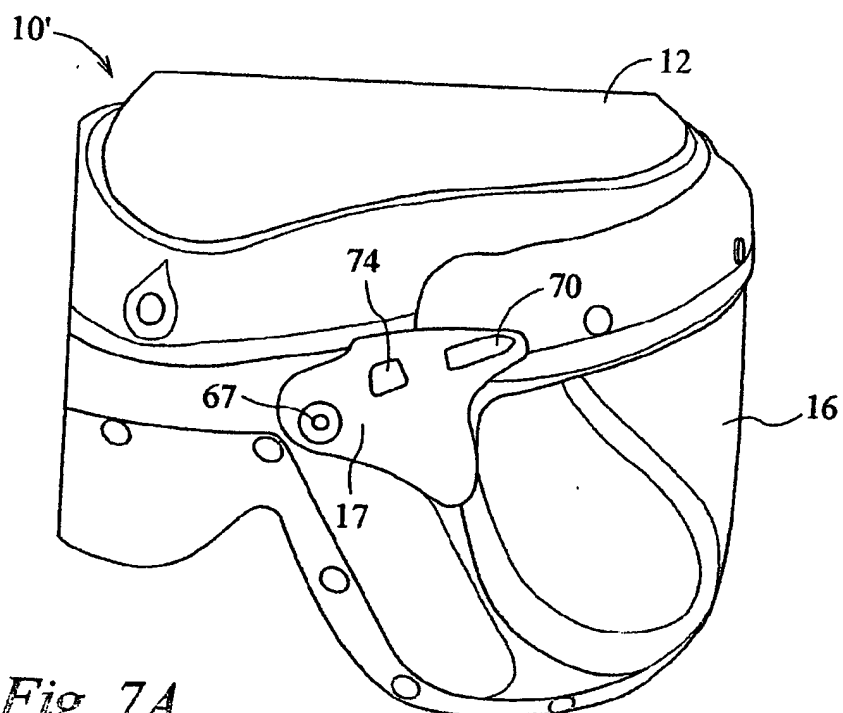


Fig. 7A


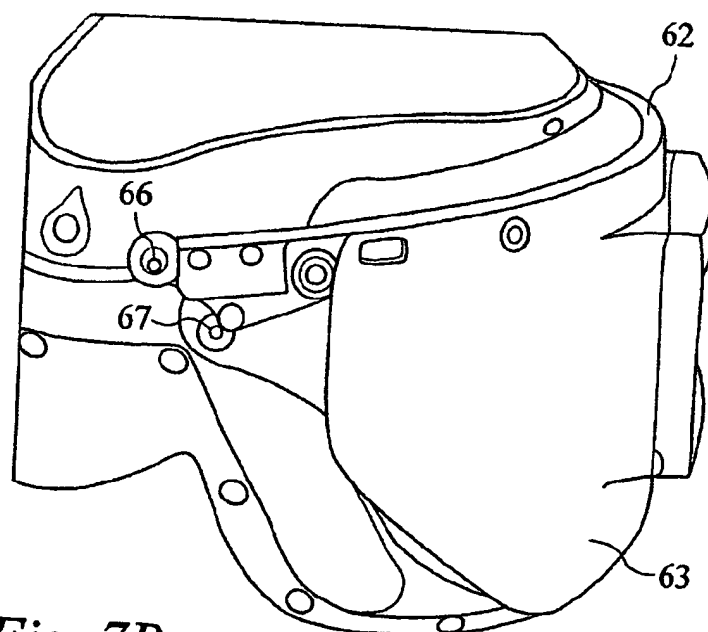


Fig. 7B

WO 2004/084665

PCT/GB2004/001395


7/10

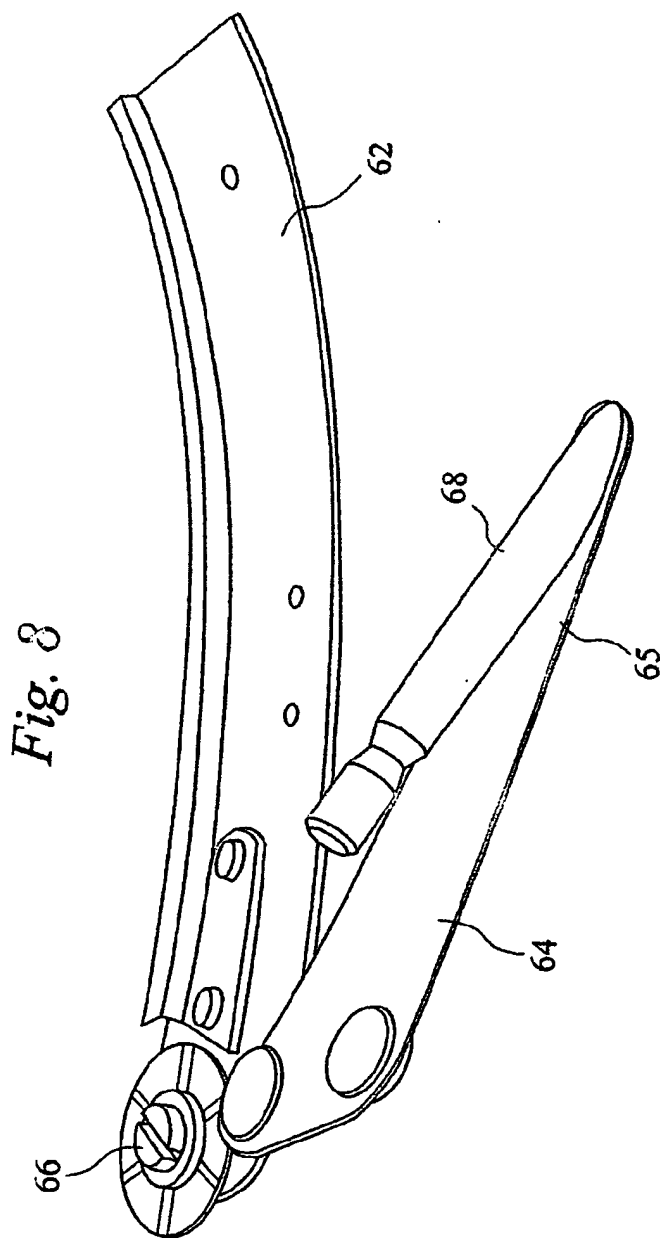

WO 2004/084665

PCT/GB2004/001395


8/10

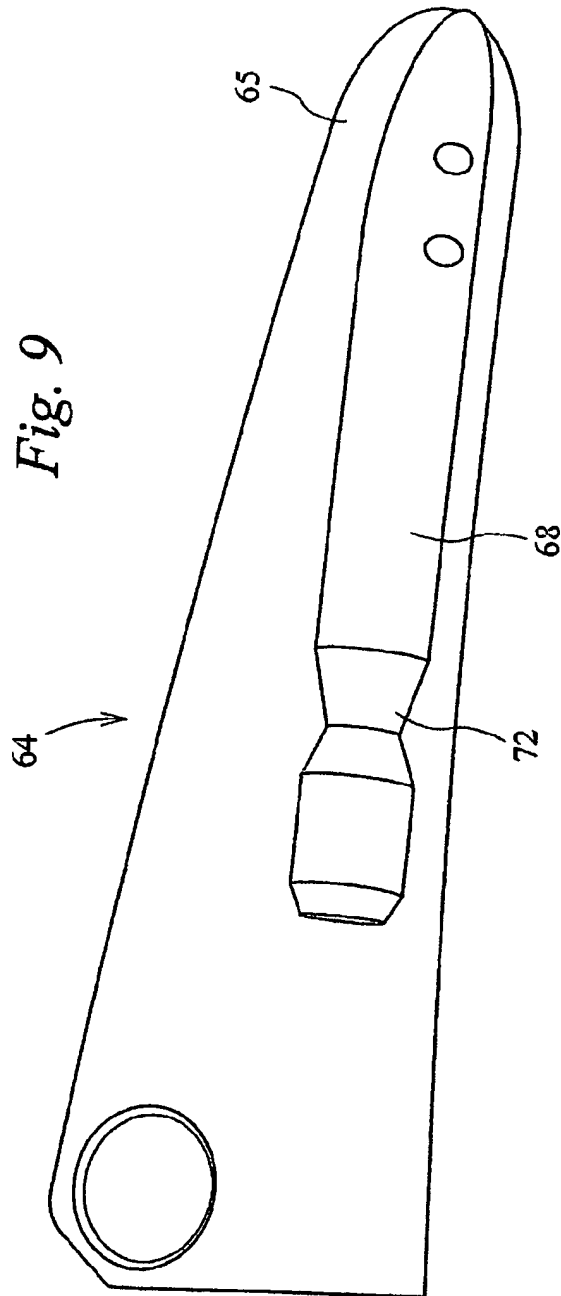


WO 2004/084665

PCT/GB2004/001395


9/10

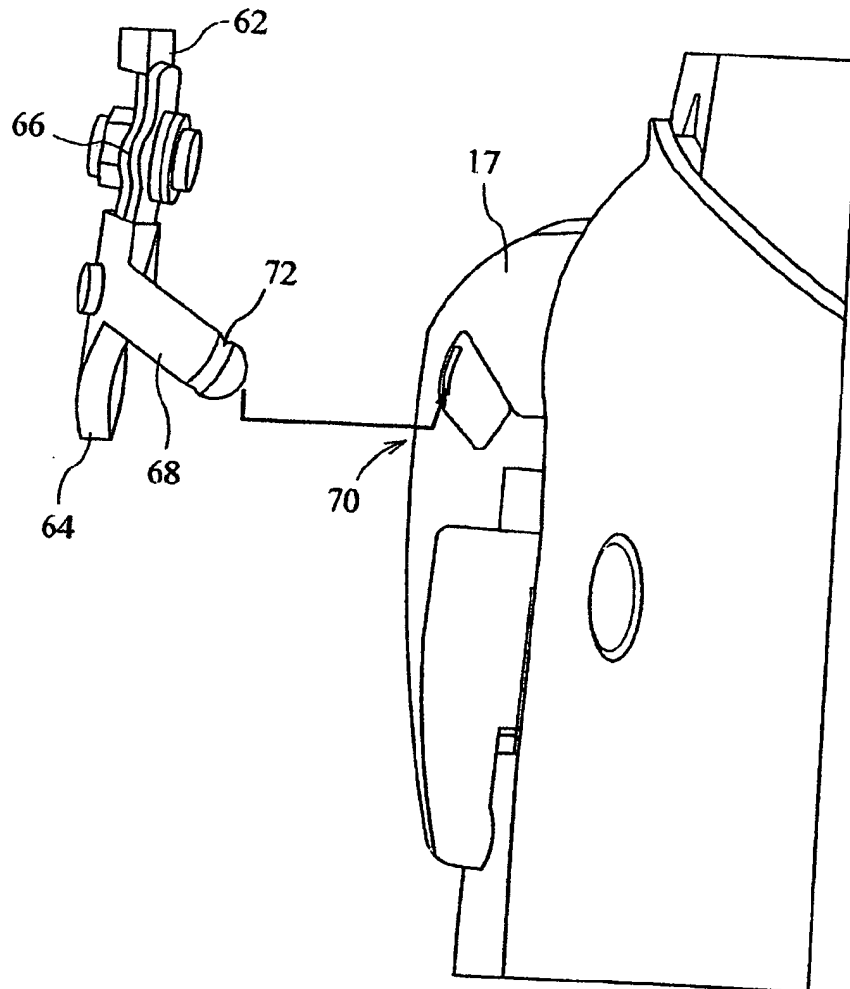*Fig. 10*

10/10

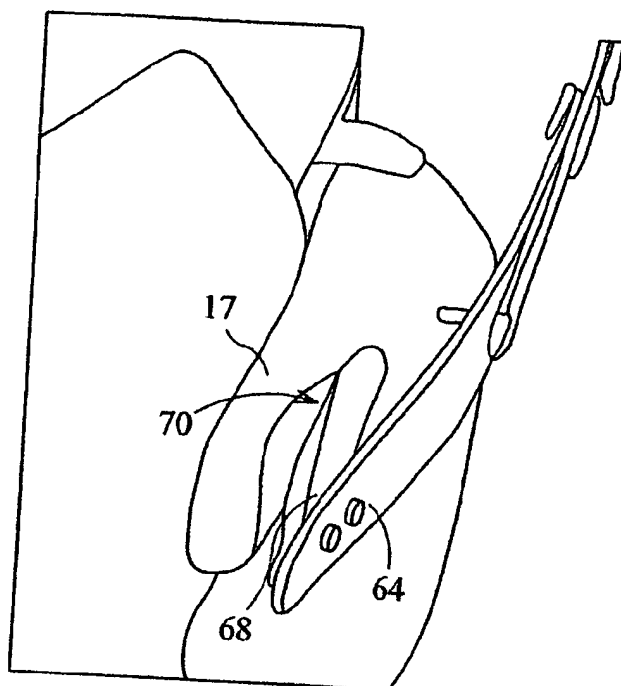

*Fig. 11*

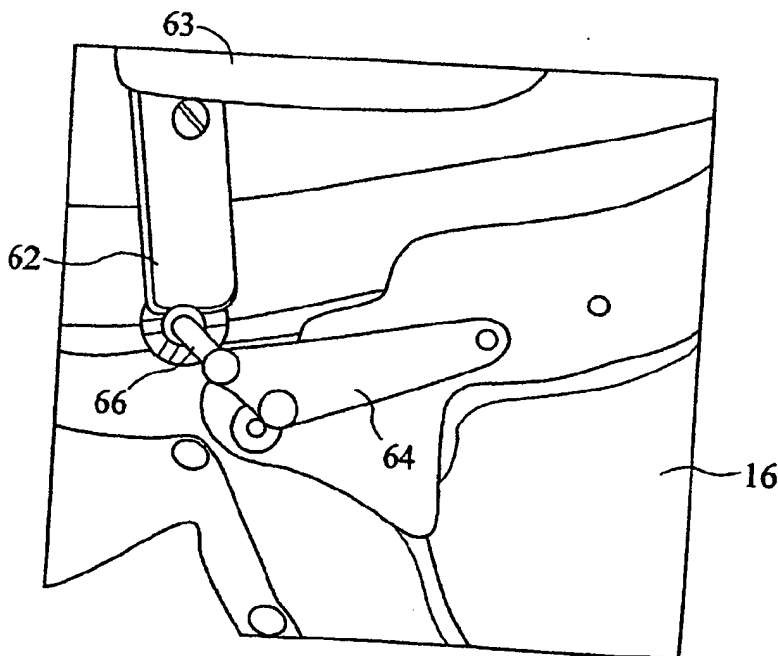

*Fig. 12*



# INTERNATIONAL SEARCH REPORT

International Application No.  
PC B2004/001395

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A42B3/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A42B A62B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 86/03656 A (LOENNSTEDT BO GUNNAR) 3 July 1986 (1986-07-03) page 3, lines 15,16; figure 1	1-5,7,8, 12
A	-----	6,9-13
X	DE 41 32 404 A (VER ENERGIEWERKE AG) 1 April 1993 (1993-04-01) column 1, line 68 - column 2, lines 1-13; figure 1	1-3,5,7, 8
A	-----	
A	DE 298 20 078 U (ENHA KUNSTSTOFFVERARBEITUNGS G) 23 March 2000 (2000-03-23) abstract; figures	
A	-----	
A	US 4 713 844 A (WESTGATE CHARLES A) 22 December 1987 (1987-12-22) column 2, lines 32-34; figure 1.	
	-----	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- "X" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principles or theory underlying the invention
- "C" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "I" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "S" document member of the same patent family

Date of the actual completion of the international search

18 August 2004

Date of mailing of the international search report

02 NOV. 2004

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

van Bilderbeek, H.

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT B2004/001395

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 87 14 490 U (ALLIT-PLASTIC-WERK KIMNACH GMBH & CO) 22 September 1988 (1988-09-22) figures 1,2 -----	

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/GB2004/001395

## Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-13

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-13

A screen bar for a respirator helmet or other helmet adapted to carry a protective screen  
---

2. claims: 14-22

A respirator  
---

# INTERNATIONAL SEARCH REPORT

ation on patent family members

Interr

I Application No

PC

2004/001395

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 8603656	A	03-07-1986	SE 455152 B DE 3590667 C2 DE 3590667 T EP 0205545 A1 GB 2178943 A ,B SE 8406477 A WO 8603656 A1	27-06-1988 12-09-1996 19-02-1987 30-12-1986 25-02-1987 20-06-1986 03-07-1986
DE 4132404	A	01-04-1993	DE 4132404 A1 DE 9113942 U1	01-04-1993 04-02-1993
DE 29820078	U	23-03-2000	DE 29820078 U1	23-03-2000
US 4713844	A	22-12-1987	NONE	
DE 8714490	U	22-09-1988	DE 8714490 U1	22-09-1988